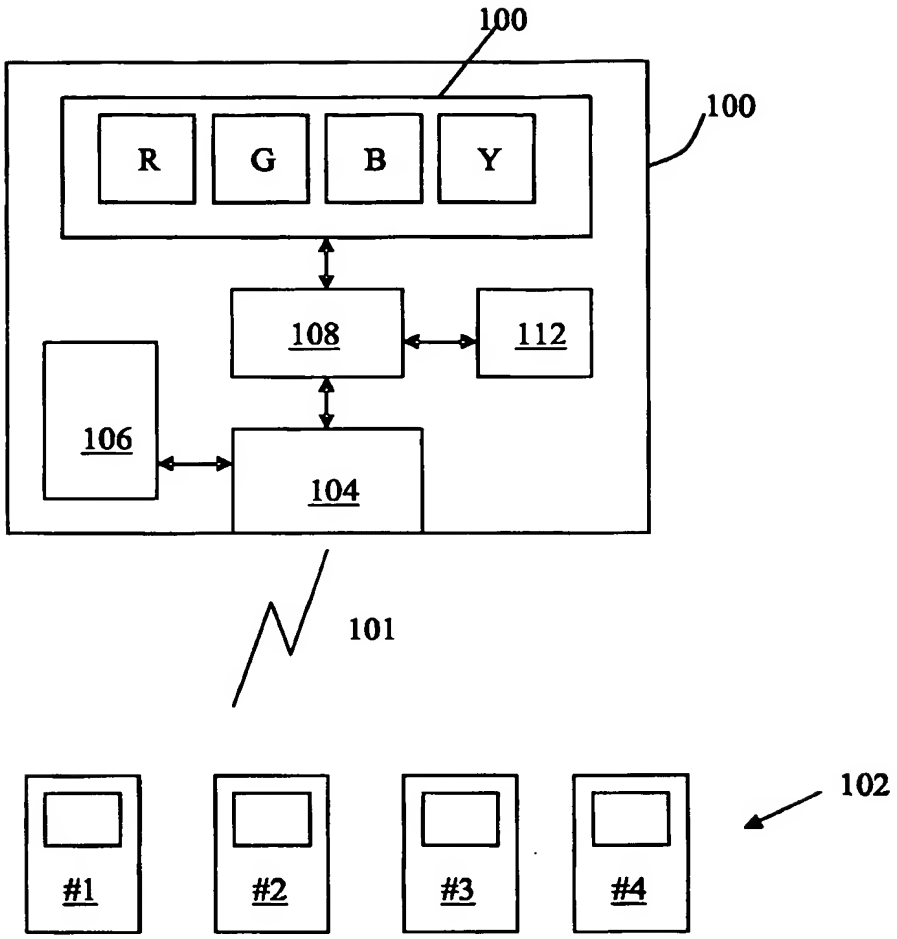


FIG 1

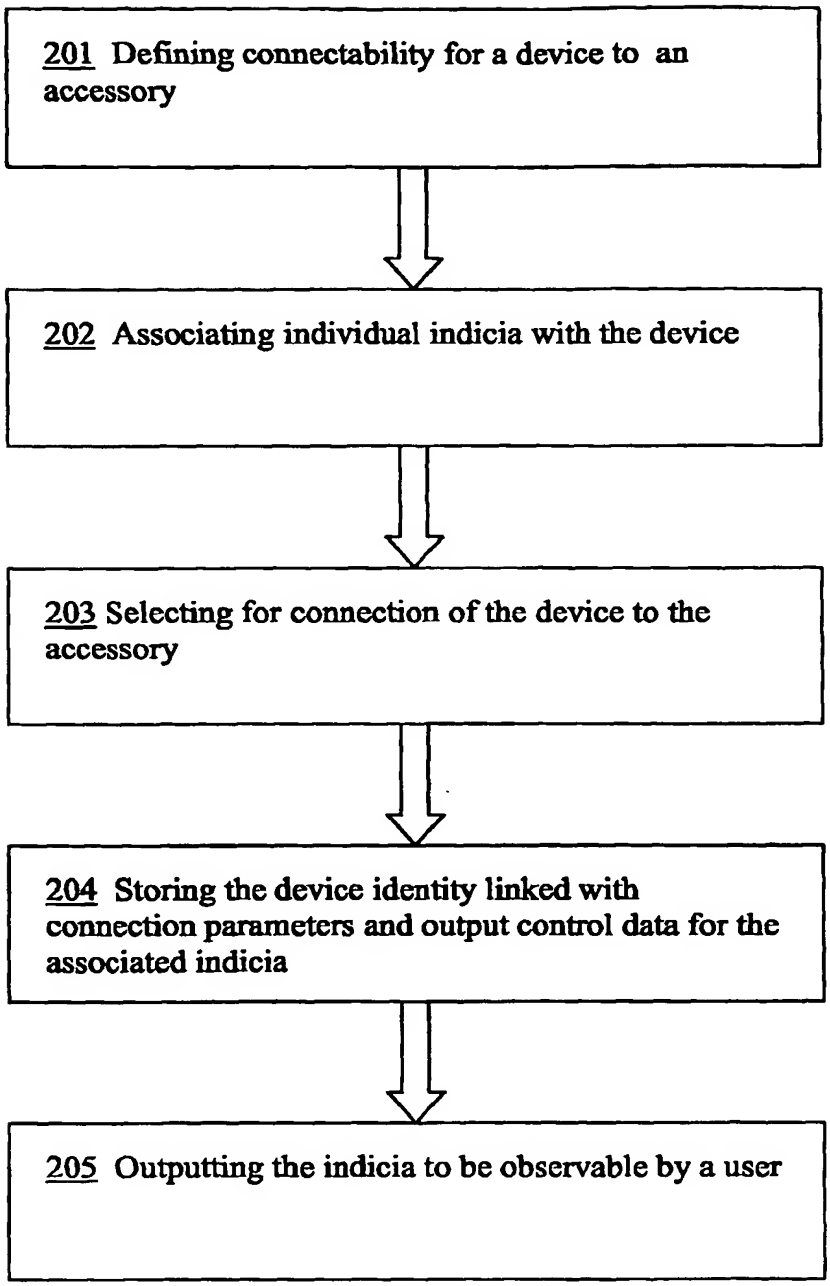
201 Defining connectability for a device to an accessory
202 Associating individual indicia with the device
203 Selecting for connection of the device to the accessory
204 Storing the device identity linked with connection parameters and output control data for the associated indicia
205 Outputting the indicia to be observable by a user

FIG 2

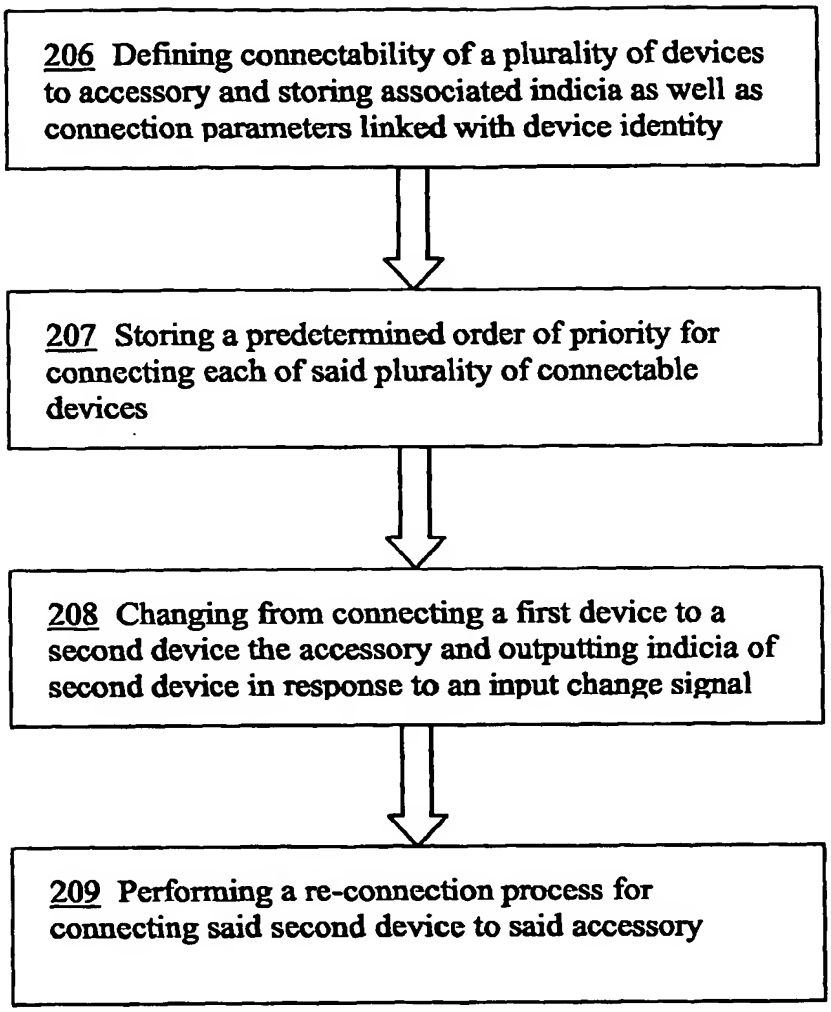
206 Defining connectability of a plurality of devices to accessory and storing associated indicia as well as connection parameters linked with device identity
207 Storing a predetermined order of priority for connecting each of said plurality of connectable devices
208 Changing from connecting a first device to a second device the accessory and outputting indicia of second device in response to an input change signal
209 Performing a re-connection process for connecting said second device to said accessory

FIG 3